

Hydrotech® Systemfilter®

formerly known as Systemfilter®



BUILDING TRUST




GENERAL DESCRIPTION

Systemfilter is a non-woven, needle punched, geotextile filter sheet made of non-deteriorating, polypropylene fibers. It is made to be highly resistant to all natural acids and alkalis and is chemically neutral.

BASIC USE

Systemfilter is specifically designed to be used as a filter fabric over the Gardendrain® elements in Hydrotech's Garden Roof® Assemblies. Systemfilter shall be installed as indicated in Hydrotech's Garden Roof Installation Guidelines.

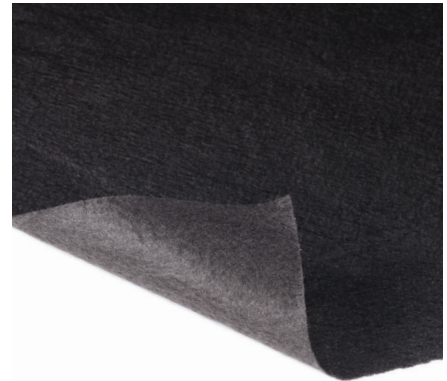

PRODUCT INFORMATION

Systemfilter - Large is available in rolls of 12.5 ft X 120 ft (3.8 m X 36.5 m) with 1,368 ft² of effective coverage.

Systemfilter - Mini is available in rolls of 1 ft X 360 ft (0.305 m X 109.7 m) and 2 ft X 360 ft (0.61 m X 109.7 m) with 339 ft² and 693 ft² respectively of effective coverage.

TECHNICAL DATA

PROPERTY	TEST METHOD	RESULTS
WEIGHT	ASTM D5261	3.5 oz/yd ² (119 g/m ²)
FLOW RATE	ASTM D4491	150 gal/min/ft ² (6,095 l/min/m ²)
PERMITTIVITY	ASTM D4491	2.0 sec ⁻¹
TENSILE STRENGTH	ASTM D4632	90 lb (401 N)
ELONGATION	ASTM D4632	50%
CBR PUNCTURE RESISTANCE	ASTM D6241	265 lbs / 1.178kN
TRAPEZOIDAL TEAR	ASTM D4533	40 lb (0.178 kN)
APPARENT OPENING	ASTM D4751	50 (0.3 mm)
UV RESISTANCE	ASTM D4355	70/500 (%/hrs)

LEED® INFORMATION

	Credit 4	Credit 5
Recycled Content (% by weight)	5 (pi)	
Manufacture Location		Athens, GA
Extraction/Harvesting Location		Garyville, LA

Prior to each use of any product of Sika Corporation, its subsidiaries or affiliates ("SIKA"), the user must always read and follow the warnings and instructions on the product's most current product label, Product Data Sheet and Safety Data Sheet which are available at usa.sika.com or by calling SIKA's Technical Service Department at 1-800-933-7452. Nothing contained in any SIKA literature or materials relieves the user of the obligation to read and follow the warnings and instructions for each SIKA product as set forth in the current product label, Product Data Sheet and Safety Data Sheet prior to use of the SIKA product.

SIKA warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within the product's shelf life. User determines suitability of product for intended use and assumes all risks. User's and/or buyer's sole remedy shall be limited to the purchase price or replacement of this product exclusive of any labor costs. **NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.**

Sale of SIKA products are subject to the Terms and Conditions of Sale which are available at <https://usa.sika.com/en/group/SikaCorp/termsandconditions.html> or by calling 1-800-933-7452.