

Hydrotech® GardenEdge®

formerly known as GardenEdge®



BUILDING TRUST



GENERAL DESCRIPTION

The GardenEdge metal edge restraint is made of 0.10 inch thick unfinished aluminum or 0.0625 inch (16 gauge) unfinished stainless steel fabricated at a 90 degree angle with a slotted vertical leg to allow for drainage. Flex Edge is available with fingered horizontal legs to accommodate curved configurations.

Leveling Strips are made of the same material and are available in varying heights. The strips are bolted to the GardenEdge where there is a need to create a level surface over a sloped deck. Allow 50% overlap of the leveling strip when attaching to the GardenEdge.


Custom color metals, finishes, and bending configurations are available.

BASIC USE

GardenEdge is specifically designed to provide a transition between Hydrotech’s LiteTop® growing media and elements like stone or concrete paver ballast at vegetation free-zones, building perimeters, roof penetrations, etc.

INSTALLATION

- GardenEdge shall be installed as indicated in Hydrotech’s Extensive Garden Roof® Installation Guidelines.
- GardenEdge can be placed either on top of the insulation layer or Gardendrain®, and is held in place by the weight of the LiteTop growing media placed over the horizontal leg.
- In-line and corner GardenEdge sections are connected with clip and corner assemblies of various heights and configurations. Clip and corner assemblies use bolts and nuts for the final connections.
- GardenEdge is not intended to be mechanically attached to or through the roofing membrane assembly.
- GardenEdge is not intended to be used to support a load, such as at the bottom of a sloped roof along the eave.
- To avoid “white rust” corrosion common in aluminum, avoid storing nested GardenEdge products in a wet environment. Hydrotech is not responsible for staining caused by this corrosion.
- GardenEdge is supplied in a standard mill finish aluminum. For areas where a higher aesthetic finish is desired, stainless steel GardenEdge is available. Power-coated finishes are also available.

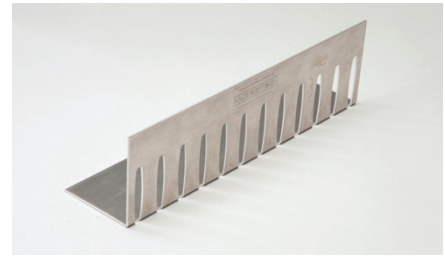

TECHNICAL DATA

THICKNESS:	0.10 inch thick unfinished aluminum or 0.0625 inch thick (16 gauge) unfinished stainless steel
DIMENSIONS:	Vertical heights of 3.0 inches – 9 inches (custom heights also available) Horizontal Leg - between 3” - 7” long (standard sizing is 1” increments for vertical height); 8 foot long sections
SLOTS:	0.372 inch effective slot mean diameter; Approx. 2” tall, 0.93 sq.in. total opening; 12 slots per linear foot
ACCESSORIES:	Corner pieces, clips and connection bolts are also available

LEED® INFORMATION

	Credit 4	Credit 5
Recycled Content (% by weight)	41.5 (pi)	
Manufacture Location		Evanston, IL
Extraction/Harvesting Location		Oswego, NY

Prior to each use of any product of Sika Corporation, its subsidiaries or affiliates ("SIKA"), the user must always read and follow the warnings and instructions on the product's most current product label, Product Data Sheet and Safety Data Sheet which are available at usa.sika.com or by calling SIKA's Technical Service Department at 1-800-933-7452. Nothing contained in any SIKA literature or materials relieves the user of the obligation to read and follow the warnings and instructions for each SIKA product as set forth in the current product label, Product Data Sheet and Safety Data Sheet prior to use of the SIKA product.

SIKA warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within the product's shelf life. User determines suitability of product for intended use and assumes all risks. User's and/or buyer's sole remedy shall be limited to the purchase price or replacement of this product exclusive of any labor costs. **NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.**

Sale of SIKA products are subject to the Terms and Conditions of Sale which are available at <https://usa.sika.com/en/group/SikaCorp/termsandconditions.html> or by calling 1-800-933-7452.